



DIAMOND BLADES

DCM-T



DCM-T CONSTRUCTION MATERIALS & METAL

DESCRIPTION : A turbo rim blade with special cooling holes and a reinforced flange centre for increased stability, blade cooling and less chipping. Good cutting speed and life. Reinforced flange on 230 and 300mm diameters.

USE ME FOR : Indian stone / Granite / House bricks / Class A engineering bricks / Clay products / All reinforced concrete types / Ferrous metal sections up to 5mm gauge / Concrete, kerbs, beams, lintels & flags

GOOD CUTTING SPEED & LIFE

10MM CONTINUOUS TURBO RIM

VENTILATED CORE / SINTERED BOND

REINFORCED FLANGE ON 230 / 300MM

INCREASED STABILITY / LESS CHIPPING



MATERIAL TYPE

CONSTRUCTION APPLICATIONS
CONSTRUCTION

HARD / DENSE MATERIAL

GLASS / REINFORCED PLASTIC	
POLYURETHANE	
FIBREGLASS	
MARBLE - DRY CUTTING	
STEEL BARS, PIPE & SECTIONS	
SG & GREY IRON	
PORCELAIN & HARD TILES	
CERAMIC TILES	
INDIAN STONE	
GRANITE	
SLATE	
CLASS A ENGINEERING BRICKS	
CLAY PAVIORS / PIPES / TILES	
FLINT AGGREGATE PRODUCT	
CLASS B ENGINEERING BRICKS	
HEAVILY REINFORCED CONCRETE	
MEDIUM REINFORCED CONCRETE	
LIGHTLY REINFORCED CONCRETE	
CONCRETE	
HARD YORK STONE	
QUARTZITE	
LONDON BRICK	
HARD CONCRETE PRODUCTS	
KERBS / LINTELS / BEAMS	
CAST PIPES	
BRICKS / CONCRETE FLAGS	
HAND MADE BRICKS	
FACING BRICKS	
CONCRETE ROOF TILES	
SOFT CONCRETE PAVIORS	
SAND BASED PAVIORS	
GREEN CONCRETE	
CEMENT SCREED	
LIGHTWEIGHT CONCRETE BLOCK	
HOT ROLLED ASPHALT	
ABRASIVE SAND / GRITSTONE	
ASPHALT OVER CONCRETE	
ASPHALT	
ABRASIVE MORTAR	

SOFT / ABRASIVE MATERIAL


MULTIPLE APPLICATIONS: CONSTRUCTION

STANDARD

DIMENSIONS	DCM-T
(4½") 115 x 22.20	115DCM-T ∞
(9") 230 x 22.20	230DCM-T ∞
(12") 300 x 20.00	300DCM-T ∞


CONTINUOUS TURBO RIM

If a diamond blade has a continuous turbo rim then there will be less chipping than with segmented blades and faster cutting due to the castellation of the rim. This clears debris quicker and keeps the blade cool by trapping air in motion.

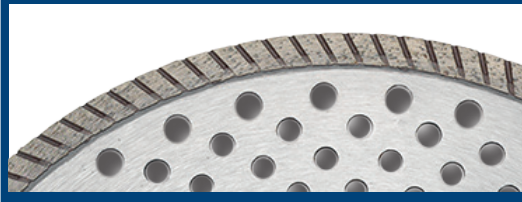

COOLING HOLES

Cooling holes in a blade as the description says, will keep the steel core cool and will prevent distortion of that core. Keeping the diamond matrix cool in segments will improve speed and life.



REINFORCED FLANGE

A reinforced flange gives the diamond blade more stability under extreme use and keeps the steel core in line, therefore giving a cleaner, straighter cut.



THE STANDARD-LINE FROM DURO, WITH A BROAD PRODUCT RANGE AND MANY TOOLS OFFERING PERFORMANCE LEVELS WELL ABOVE THE INDUSTRY STANDARD, THE OUTPUT OF THESE TOOLS IS VERY GOOD.



HIGHLY SUITED
 NOT SUITABLE
 SUITABLE WITH RESERVATIONS

ORDER LINE: 01909 552470 / 1

WWW.DURO-DIAMONDS.COM

WWW.YOKOTA.CO.UK